

Metric Swivel Hoist Rings

Load Rated **Fatigue Rated**



**SEE APPLICATION AND
WARNING INFORMATION**


Para Español: www.thecrosbygroup.com

On Pages 190-192

HR-125M



- Top washer has the following features:
 - The Working Load Limit and Recommended Torque value are permanently stamped into each washer.
 - Washer is color coded for easy identification: Silver - Metric thread.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- Bolt specification is a Grade 12.9 Alloy socket head cap screw to Din 912. All threads listed are metric (ASME/ANSI B18.3.1m).
- Designed to be used with ferrous work piece only.
- **BOLT SIZE IDENTIFICATION:** The size of the bolt will be stated as in the drawing below. Illustration shows meaning of each dimension given.
- **NOTE:** For Special Applications, see page 456.
- Frame 2 and larger are **RFID EQUIPPED**.

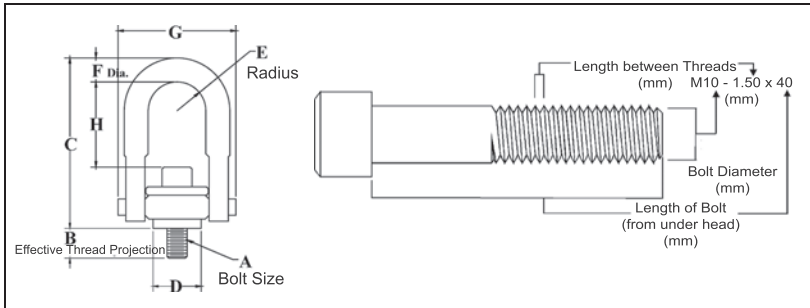

HR-125M

Metric Threads

HR-125M Stock No.	Working Load Limit (kg)		Torque in Nm*	Dimensions (mm)								Weight Each (kg)
	At a 5:1 Design Factor†	At a 4:1 Design Factor†		Bolt Size (A) ‡	Effective Thread Length (B)	C	D	Radius E	Diam. F	G	H	
1016602	400	500	10	M8X 1.25 X 40	16.9	68.1	25.4	11.8	8.5	42.9	28.2	.19
1016613	450	550	16	M10 X 1.50 X 40	16.9	68.1	25.4	11.8	8.5	42.9	27.69	.19
1016624	1050	1300	38	M12 X 1.75 X 50	17.2	124.5	50.8	22.3	17.5	82.7	58.17	1.13
1016635	1900	2400	81	M16 X 2.00 X 60	27.2	124.5	50.8	22.3	17.5	82.7	56.13	1.22
1016644	2150	2700	136	M20 X 2.50 X 65	31.2	124.5	50.8	22.3	17.5	82.7	52.07	1.36
1016657	3000	3750	136	M20 X 2.50 X 75	28.1	167.0	76.2	34.7	25.4	120.1	75.69	3.18
1016668	4200	5250	312	M24 X 3.00 X 80	33.1	167.0	76.2	34.7	25.4	120.1	74.93	3.18
1016679	7000	8750	637	M30 X 3.50 X 120	65.1	220.0	95.3	44.5	30.5	152.4	102.0	6.70
1016690	11000	13750	1005	M36 X 4.00 X 150	60.6	315.3	120.7	57.2	44.5	203.2	124.2	14.95
1016701	12500	15600	1005	M42 X 4.50 X 160	70.6	315.3	120.7	57.2	44.5	203.2	150.6	16.33
1016712	13500	16900	1350	M48 X 5.00 X 160	70.6	315.3	120.7	57.2	44.5	203.2	137.9	16.33

* The tightening torque values shown are based upon threads being clean, dry and free of lubrication.

† Individually proof loaded to 2-1/2 times the Working Load Limit based on the 4:1 design factor.

‡ Bolt specification is a Grade 12.9 Alloy socket head cap screw to Din 912. All threads are metric (ASME/ANSI B18.3.1m).