

# Crosby Grade 100 Eye Sling Hooks

**Fatigue Rated**

**"QT"**  
QUENCHED & TEMPERED

**QUIC-CHECK**  
✓


**Crosby 8/10™**

**SEE APPLICATION AND WARNING INFORMATION**  
Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) On Pages 128-129

## S-1327



- Forged Alloy Steel - Quenched and Tempered.
- Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby & U.S.A. in raised letters.
- 25% stronger than Grade 80.
- Engineered Flat for use with S-1325A coupler link.
- Eye Sling hooks incorporate two types of strategically placed markings forged into the product which address two (2) **QUIC-CHECK**® features: Deformation Indicators and Angle Indicators.
- Low profile hook tip.
- Utilizes S-4320 integrated latch which meets the world standard for lifting.
  - Heavy duty stamped latch interlocks with the hook tip.
  - High cycle, long life spring.
  - When secured with the proper cotter pin through the hole in the tip of hook, meets the intent of OSHA Rule 1926.550(g) for personnel lifting.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Suitable for use with Grade 100 and Grade 80 chain.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- "Look for the Platinum Color - Crosby Grade 100 Alloy Products."

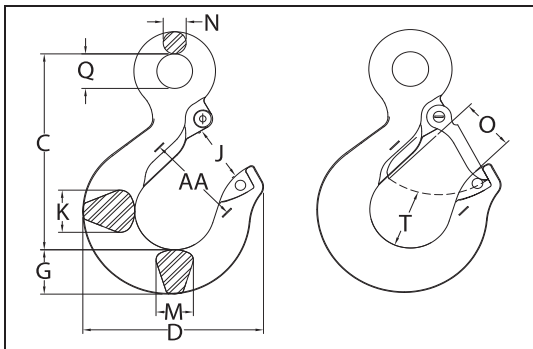

## S-1327 Eye Sling Hook

Grade 100 Alloy Chain Size		Working Load Limit (t)*	Hook ID Code	S-1327 Stock No.	L-1327 Stock No.	Weight Each (kg)	Dimensions (mm)										Replacement Latch Stock No.	
(in.)	(mm)						C	D	G	J	K	M	N	O	Q	T		AA
-	6	1.5	DA	1025857	1025860	.23	84.8	72.9	18.5	22.9	16.0	16.0	9.1	22.6	19.1	22.1	38.1	1096325
1/4-5/16	7-8	2.6	HA	1025866	1025869	.59	107	99.1	26.2	30.0	19.1	19.1	12.7	29.2	19.1	29.5	50.8	1096468
3/8	10	4.0	IA	1025875	1025878	1.04	127	110	30.2	38.9	30.2	25.4	14.2	35.6	23.9	31.2	63.5	1096515
1/2	13	6.8	JA	1025884	1025887	2.04	161	144	36.6	45.2	34.8	29.7	18.3	42.4	28.4	47.8	76.2	1096562
5/8	16	10.3	KA	1025893	1025896	3.81	189	172	47.8	60.5	42.2	36.6	22.4	56.1	33.3	51.6	102	1096609
3/4	18-20	16.0	K	1025911	-	6.80	230	189	57.2	58.2	47.8	41.4	28.2	52.8	62.0	62.7	102	1096609
7/8	22-23	20.0	L	1025920	-	9.39	256	211	65.8	63.5	55.6	49.3	32.3	57.7	72.1	66.5	102	1096657
1	26	27.1	N	1025929	-	17.9	326	262	76.2	83.8	68.3	60.5	39.6	76.7	88.9	71.9	127	1096704
1 1/4	32	41.0	P	1025938	-	47.6	462	357	116	108	95.3	81.0	50.8	76.2	114	98.6	178	1093717

\* Ultimate Load is 4 times the Working Load Limit.

Chain & Accessories