


# Ring Bolts - Pad Eyes



G-257



- Forged Steel - Quenched and Tempered.
- Hot Dip galvanized.
- All Bolts Hot Dip galvanized after threading.
- Diameter of ring stock is same as shank diameter.

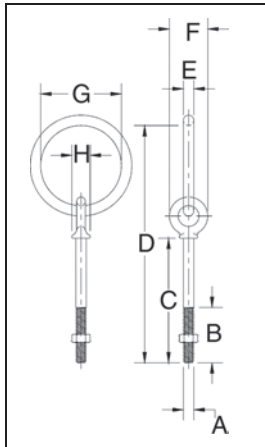

G-257  
Shoulder Nut Ring Bolts

Ring Bolt Size (mm)	G-257 Stock No.	Working Load Limit (t)*	Weight Per 100 (kg)	Dimensions (mm)							
				A	B	C	D	E	F	G	H
9.53 X 114	1046335	.54	25.7	9.65	63.5	114	195	9.70	35.1	51.0	16.8
12.7 X 152	1046371	1.00	45.4	12.7	76.0	152	254	12.7	44.5	63.5	23.1


\* Ultimate Load is 5 times the Working Load Limit.



S-264



- Forged Steel — Quenched and Tempered.
- Forged from 1035 Carbon Steel.
- Excellent welding qualities.
- Widely used on farm machinery, trucks, steel hulled marine vessels and material handling equipment.
- Reference American Welding Society specifications for proper welding procedures.

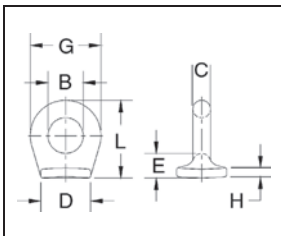

S-264  
Pad Eyes

Size No.*	S-264 Stock No.	Weight Per 100 (kg)	Dimensions (mm)						
			B	C	D	E	G	H	L
* 0	1090722	1.27	6.35	4.85	16.0	7.85	16.0	2.30	19.1
* 1	1090740	2.95	9.65	6.35	22.4	10.4	22.4	3.30	26.2
* 1.5	1090768	4.72	16.0	6.35	25.4	11.2	28.7	4.05	33.3
2	1090786	9.57	19.1	9.65	26.9	12.7	38.1	4.85	41.4
4	1090802	23.7	25.4	14.2	36.6	19.8	54.0	5.60	59.5
5	1090820	37.4	31.8	17.5	44.5	20.6	67.0	6.35	70.0

\* Meets the requirements of Military Specification MS-51930A.