

Crosby® SHUR-LOC® Hooks

Fatigue Rated

"QT"
QUENCHED & TEMPERED

QUIC-CHECK®

Crosby 8/10™



Para Español: www.thecrosbygroup.com

SEE APPLICATION AND WARNING INFORMATION

On Pages 247-248

S-1326




- Forged Alloy Steel - Quenched and Tempered.
- Individually Proof Tested at 2-1/2 times the 4:1 Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Rated for both Wire Rope and use with Grade 80/100 Chain.
- G-414 Heavy Thimble should be used with wire rope slings.
- Trigger repair Kit available (S-4316). Consists of spring, roll pin and trigger.
- S-13326 Swivel Hook utilizes anti-friction bearing design which allows hook to rotate freely under load.
- Fatigue rated.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- "Look for the Platinum Color – Crosby Grade 100 Alloy Products".
- U.S. Patent 5,381,650 and foreign equivalents.

S-13326



Hooks & Swivels

Use in corrosive environment requires shank and nut inspection in accordance with ASME B 30.10-1.10.4 (b)(5)(c) 2009.

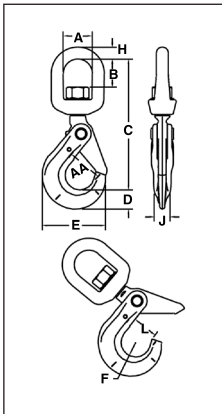


S-1326 SHUR-LOC® Swivel Hooks

- Suitable for infrequent, non-continuous rotation under load.

Chain Size	Grade 100 Alloy Chain Working Load Limit (t) 4:1	Wire Rope XIP IWRC Mechanical Splice		S-1326 Stock No.	Weight Each (kg)	Dimensions (mm)										
		Size (mm)	Working Load Limit (t) 5:1*			A	B	C	D	E	F	H	J	L	AA	
-	6	1.45	8	1.00	1004304	.57	38.1	33.5	156	20.1	66.0	170	12.7	16.0	28.7	38.1
1/4 - 5/16	7-8	2.59	11	1.90	1004313	1.18	44.5	40.4	193	279	88.9	22.1	16.0	20.6	35.1	51.0
3/8	10	3.99	13	2.50	1004322	2.13	50.8	43.9	224	29.7	112	279	19.1	23.9	44.5	63.5
1/2	13	6.80	16	3.90	1004331	3.92	63.5	60.5	284	42.4	139	32.0	25.4	29.5	53.6	76.2
5/8	16	10.3	22	7.50	1004340	7.71	69.9	64.3	328	51.8	167	38.1	28.7	38.1	63.2	89.0
3/4	18 - 20	16.0	26	9.90	1004349	10.9	71.9	64.0	358	56.4	197	51.1	27.9	51.6	89.4	127
7/8	22	20.0	28.5	12.10	1004358	13.2	87.4	81.0	417	62.2	222	57.4	33.0	55.9	97.3	152

*Ultimate Load is 4 times the Working Load Limit.

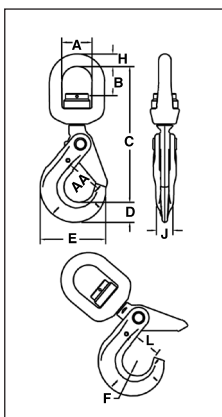

S-13326 SHUR-LOC® Swivel Hooks with Bearing

- Suitable for frequent rotation under load.

Chain Size	Grade 100 Alloy Chain Working Load Limit (t) 4:1*	Wire Rope XIP IWRC Mechanical Splice		S-13326 Stock No.	Weight Each (kg)	Dimensions (mm)										
		Size (mm)	Working Load Limit (t) 5:1*			A	B	C	D	E	F	H	J	L	AA	
-	6	1.45	8	1.00	1004404	.57	38.1	29.0	157	20.1	66.0	170	12.7	16.0	28.7	38.1
1/4 - 5/16	7-8	2.59	11	1.90	1004413	1.18	44.5	38.6	192	27.9	89.0	22.1	16.0	20.6	35.1	51.0
3/8	10	3.99	13	2.50	1004422	2.13	51.0	40.9	226	29.7	112	27.9	19.1	23.9	46.5	63.5
1/2	13	6.80	16	3.90	1004431	3.92	63.5	51.6	282	42.4	138	32.0	25.4	29.5	53.5	76.2
5/8	16	10.3	22	7.50	1004440	7.71	70.0	50.3	328	52.0	167	38.1	28.7	38.1	63.0	89.0

*Ultimate Load is 4 times the Working Load Limit.